


Sullair SRV Specifications

SRV-250 to SRV-500 Specifications

Model	SCFM * 35-39°F	m³/min 2-4°C	Weight		Length		Width		Height		Air in/out
			lbs.	kg.	in.	mm.	in.	mm.	in.	mm.	
SRV-250	250	7.1	309	141	26.5	673	36.3	922	47.7	1212	1-1/2"
SRV-325	325	9.2	309	141	26.5	673	36.3	922	47.7	1212	2"
SRV-400	400	11.3	317	144	26.5	673	36.3	922	47.7	1212	2"
SRV-500	500	14.2	331	151	26.5	673	36.3	922	47.7	1212	2"

* Rated flow at CAGI Standard ADF100 for Class H: 33 to 39° pressure dewpoint at 100°F and 100 psig. inlet, 100°F ambient, 100% inlet relative humidity, and 5 psid maximum pressure drop.

Air flow refers to 100°F inlet / 100°F ambient / 100 psig inlet pressure.

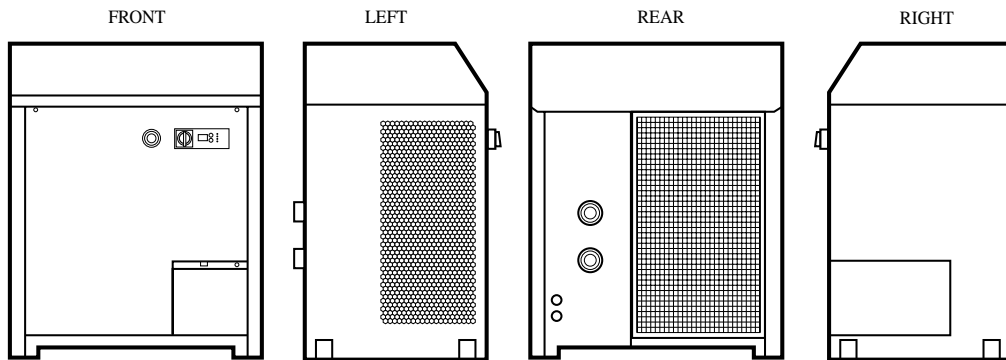

SRV-700 to SRV-2400 Specifications

Model	SCFM * 35-39°F	m³/min 2-4°C	Weight		Length		Width		Height		Air in/out
			lbs.	kg.	in.	mm.	in.	mm.	in.	mm.	
SRV-700	700	19.9	882	400	51.6	1311	39.8	1011	59.1	1502	3"
SRV-800	800	22.7	926	420	51.6	1311	39.8	1011	59.1	1502	3"
SRV-1000	1000	28.3	992	450	51.6	1311	39.8	1011	59.1	1502	3"
SRV-1200	1200	34.0	992	450	51.6	1311	39.8	1011	59.1	1502	3"
SRV-1400	1400	39.6	1036	470	51.6	1311	39.8	1011	59.1	1502	4"
SRV-1600	1600	45.3	1213	551	71.3	1811	39.8	1011	59.1	1502	4"
SRV-2000	2000	56.6	1229	581	71.3	1811	39.8	1011	59.1	1502	6"
SRV-2400	2400	68.0	1301	591	71.3	1811	39.8	1011	59.1	1502	6"

* Rated flow at CAGI Standard ADF100 for Class H: 33 to 39° pressure dewpoint at 100°F and 100 psig. inlet, 100°F ambient, 100% inlet relative humidity, and 5 psid maximum pressure drop.

Air flow refers to 100°F inlet / 100°F ambient / 100 psig inlet pressure.

